




SWAPP 540 – 550 W 10BB 144 CELL HALF-CUT BİFACIAL PERC PANEL

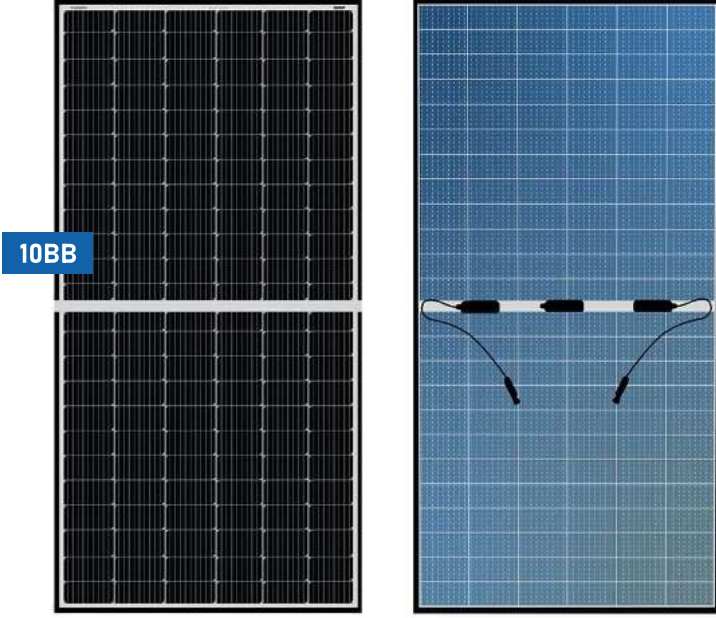

Son teknolojiye sahip üretim tesisimizde Multi – Busbar ve Half – Cut teknolojisine sahip yeni 182 mm hücreli yüksek verimlilikli paneller üretiliyoruz.

We produce new 182 mm cell high efficiency panels with Multi-Busbar and Half-Cut technology in our state-of-the-art production facility.

Ana Özellikler • 10BB Half-Cut Hücre Teknolojisi

Endüstri Lideri Yüksek Verim

Bifacial PERC hücre teknolojisi, farklı koşullara bağlı olarak %5-%25 daha fazla verim sağlar.

Mükemmel Anti-PID Performansı

Daha Geniş Uygulama

Su geçirgenliği yoktur ve aşınma direnci yüksektir, yüksek nemli, rüzgarlı ve tozlu alanlarda yaygın olarak kullanılabilir.

Key Features • 10BB Half-Cut Cell Technology

Industry Leading High Yield

Bifacial PERC cell technology, 5%-25% more yield depends on different conditions.

Excellent Anti-PID Performance

Wider Application

No water-permeability and high wear-resistance, can be widely used in high-humid, windy and dusty area.

Kalite Sistemi / Quality System



ISO9001 – ISO14001 – ISO45001

Ürün Sertifikaları / Product Certificates



IEC 61215 / IEC 61730 / IEC 62804/ IEC 61701 / IEC 62716


Güç Garantisi / Power Guarantee

25 Yıl Lineer güç çıkışı garantisi

Linear power output warranty

10 Yıl Ürün garantisi / Product warranty

Lineer Garantide İlave Değerler / Additional Value from Linear Warranty

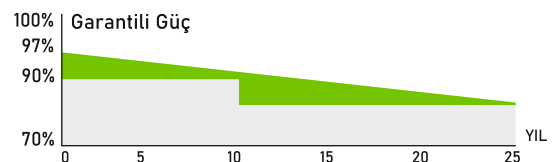

MEKANİK ÖLÇÜLER / *Mechanical Dimensions*

Technical drawing of the 2295 window unit, showing dimensions and details.

Montaj Slotu (Mounting Slot): A circular detail showing a semi-circular slot with a width of 9mm and a height of 18mm.

Çerçeve (Frame): A cross-sectional detail of the frame showing a height of 18mm and a width of 15mm.

Main Dimensions:

- Overall width: 1132mm
- Overall height: 2295mm
- Top and bottom frame thickness: 48mm
- Left and right frame thickness: 580mm
- Inner width (excluding frame): 1132mm
- Inner height (excluding frame): 2291mm

Labels and Details:

- 10x10mm Direnaj Delikleri (Resistance Holes)
- Ø4mm Topraklama Deligi (Grounding Hole)
- 18x9mm Montaj Slotu (Mounting Slot)
- 18x9mm Montaj Slotu (Mounting Slot)
- Ø4mm Topraklama Deligi (Grounding Hole)

Size Specifications:

- 1132 SIZE INCLUDING FRAME
- 1128 SIZE INCLUDING GLASS
- 2295 LENGTH INCLUDING FRAME
- 2291 LENGTH INCLUDING GLASS

NOCT : Nominal Çalışma Hücre Sıcaklığı / *Nominal Operating Cell Temperature*

Standart test koşullarından (1000 W/m², 25°C, 1,5 AM) başlayarak 200 W/m² zayıf ışık koşullarında dahi mükemmel performans.

Legend:

- 1000 W/m²
- 800 W/m²
- 600 W/m²
- 400 W/m²
- 200 W/m²

 **Dumanoglu**
swapp

DUMANOĞLU ENERJİ YATIRIM A.Ş.

Çekirdeksiz OSB Mh. 203. Cd.

No:7 Polatlı / ANKARA - TÜRKİYE

info@dumanogluenerji.com

T: +90 312 626 00 26

www.dumanogluenerji.com